

SCHEMATIC STONECREEK DR. RECONSTRUCTION

Stonecreek Drive Reconstruction Project

The City of La Center bid the reconstruction project of Stonecreek Drive in May and received bids from qualified contractors on June 1st. City Council has authorized award to the low bidder, Catworks LLC to complete the project. The contractor is planning to begin construction on August 10th and anticipates the project should be completed by the end of September.

The project consists of reconstruction of the entire paved surface, and aggregate base below the pavement. Installation of subsurface drainage pipe to remove groundwater that rises up into the pavement will be done. The contract also includes removing the existing concrete curb and replacing it with new concrete curb and gutter.

Through the duration of the project, parking on Stonecreek Drive will not be allowed between East 4th Street and East 7th Street and at the intersection of East 5th Street, so the contractor can remove and replace the curb and gutter and pavement. Stonecreek Drive will be signed to allow only one-way travel for local traffic during construction, and a detour will be in place to direct traffic to travel south from 7th Street to 4th Street.

The contractor will place no parking signs along the length of the project to alert residents to park in the driveways or find another location to park vehicles.



The contractor will close Stonecreek Drive between East 4th Street and East 7th Street to allow only local access for homes along Stonecreek Drive during reconstruction of the road. Access to Stonecreek Drive at East 5th Street will also be closed, allowing only local traffic.

Once the project starts, updates on the project schedule will be available on the City website <http://www.ci.lacenter.wa.us/>. For questions about the project, please call the City at (360) 263 7665.

SIGN SPACING:				
SPEED	A	B	C	D
45-55	500' +/-	500' +/-	500' +/-	500' +/-
35-40	350' +/-	350' +/-	350' +/-	350' +/-
25-30	100' +/-	100' +/-	100' +/-	100' +/-



Northwest Traffic Control
 Portland (503) 262-6500
 Vancouver (360) 604-5655
 Fax (503) 262-0357
 Toll Free (800) 783-9733

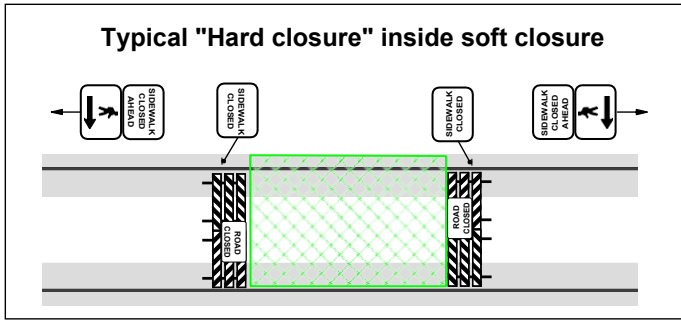

- SUMMARY OF DEVICES:**
- 4 X ROAD WORK AHEAD
 - 1 X ROAD CLOSED AHEAD
 - 3 X ROAD CLOSED TO THRU TRAFFIC (LOCAL ACCESS ONLY)
 - 2 X ROAD CLOSED
 - 2 X SIDEWALK CLOSED AHEAD
 - 1 X PED LEFT
 - 1 X PED RIGHT
 - 2 X SIDEWALK CLOSED
 - 7 X TYPE III BARRICADES (3R, 4LR/CL)
 - 4 X DETOUR RIGHT
 - 5 X DETOUR LEFT

OWNER: Catworks Construction	PROJECT / JOB NUMBER: #200750
PROJECT NUMBER / LOCATION: E Stonecreek Dr.	CITY / STATE: LaCenter, WA
PRIME CONTRACTOR: Catworks Construction	2020 Stonecreek Reconstruction
CONTACT NAME / NUMBER: Nathan / 971-506-0560	E-MAIL: nathan@catworksconstruction.com
PREPARED BY: Nathan Burris	TRAFFIC CONTROL CONTRACTOR: Northwest Traffic Control Inc.
OR Cert # 07634	Exp: 11/30/2022
WA Cert # 010685	Exp: 04/30/2021
E-MAIL: Nathan@nwtci.com	

**All signs and devices SHALL conform to the MUTCD / WAC.
 Will adjust to fit field conditions.
 Plan NOT to scale.**

FILE DATE: 07/28/2020